

Date of Action: 9.14.15	
Approved <input checked="" type="checkbox"/>	Denied <input type="checkbox"/>
By: <i>Submit</i>	

CITY COUNCIL ACTION MEMORANDUM

AM No. 15-33: Contract Award to The Electric Company in the amount of \$35,300 for Lake Lucile Campground RV Power Outlets.

Originator: Public Works Director
 Date: September 2, 2015

Agenda of: September 14, 2015

Route to:	Department Head	Signature	Date
X	Public Works Director	<i>[Signature]</i>	9/2/15
X	Finance Director	<i>[Signature]</i>	9.2.15
X	Deputy Administrator	<i>[Signature]</i>	9.2.15
X	City Clerk	<i>[Signature]</i>	9.2.15

Reviewed by Mayor Bert L. Cottle: *[Signature]* 09:03:2015

Fiscal Impact: yes \$35,300 **Funds Available:** yes

Account name/number: Lake Lucile Park-State/110-4520-452.45-60


Attachments: Plan Drawing (1 page)
 Bid Totals (2 pages)

Summary Statement: This project was advertised on July 27, 2015 for an August 11, 2015 bid opening. The Electric Company provided the low responsive bid in the amount of \$35,300. This project will provide power outlets to 16 RV camp sites in Lake Lucile Park. This project is funded by a State Grant.

Staff Recommendation: Adopt AM No. 15-33.



LAKE LUCILLE CAMPGROUND
RV POWER OUTLETS
S. ENDEAVOR STREET
WASILLA, AK 99654

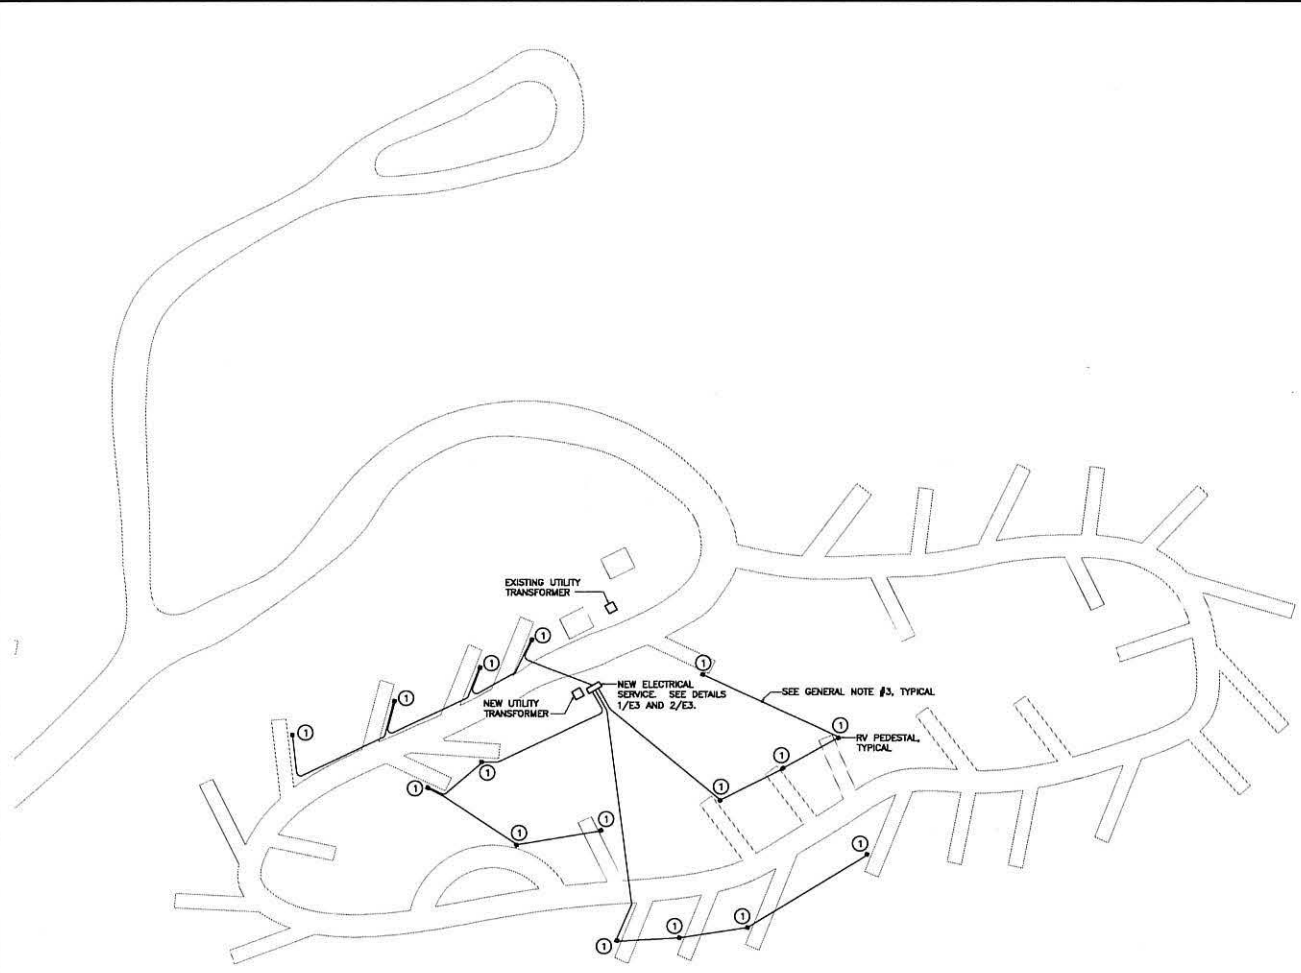

GENERAL NOTE

- ROUTING AS SHOWN IS DIAGRAMATIC; THE INTENT IS TO MINIMIZE DISRUPTION TO THE NATURAL VEGETATION TO THE EXTENT POSSIBLE. FEEDERS ARE TO BE LOOP FED INTO AND OUT OF EACH PEDESTAL, THEN ROUTED TO NEXT PEDESTAL. FINAL ROUTING SHALL BE CONFIRMED WITH THE OWNER PRIOR TO COMMENCEMENT OF WORK. PROVIDE INTERMEDIATE FULL BOXES AND TRANSITION J-BOXES AS NECESSARY. MINIMIZE SPLICES AND PROVIDE OWNER WITH PROPOSED LAYOUT AS PART OF THE SUBMITTAL PROCESS. SEE ALSO NEC 551.77 FOR ADDITIONAL REQUIREMENTS RELATED TO THE LOCATION OF THE RV SITE SUPPLY EQUIPMENT.
- ALL CIRCUIT BREAKERS AND RECEPTACLES LOCATED IN WET LOCATIONS SHALL BE WEATHERPROOF TYPE IN ACCORDANCE WITH NEC 551.78.
- ALL LOOP FEEDS FROM DISTRIBUTION PANEL TO RV PEDESTALS SHALL BE 2" CONDUIT WITH 2#6-1004-1#100.

SHEET NOTES INDICATED BY: ①

- PROVIDE RV PEDESTAL MILBANK SERIES US500 OR EQUAL WITH TYPE 3R ENCLOSURE, LOOP FEED TERMINATIONS, AND HINGED COVERS. PROVIDE WITH 50A, 125/240V RECEPTACLE, 30A, 125V RECEPTACLE AND 20A, 125V GFI RECEPTACLE AT ALL RV CAMP SITES AS INDICATED. PEDESTALS SHALL BE DIRECT BURIAL, INSTALLED PER MANUFACTURER INSTALLATION INSTRUCTIONS. SEE CIVIL FOR ADDITIONAL INFORMATION.

① ELECTRICAL SITE PLAN
SCALE: NOT TO SCALE

Revisions		
No.	Description	Date

Drawn: **BCM**
Checked: **BCM**
Date: **08-25-15**
Job No: **2015.033.0**

Sheet Contents
**ELECTRICAL
SITE PLAN**

Drawing No.
E2

BID TOTALS

Lake Lucille Campground RV Power Outlets

August 11, 2015 at 2:00 p.m.

CONTRACTOR:	Rennco Electric	The Electric Company	Electric Power Constructors	Alpine Electric
TOTAL BID	\$47,129.64	\$35,300.00	\$86,268.00	\$74,00.00

BID TOTALS

Lake Lucille Campground RV Power Outlets

August 11, 2015 at 2:00 p.m.

CONTRACTOR:	Nodak Electric and Construction	Prism Design Construction	Peak Oilfield Service Co.	Alaska Electrical Contracting
TOTAL BID	\$53,475.00	\$42,100.00	\$51,345.00	\$44,781.00